

Fuel Tank Installation

- **READ THE BENTLEY or HAYNES MANUAL FIRST!**
- You will need a FLAT surface to complete this repair for your safety.
- **READ ALL OF THIS PROCEDURE SEVERAL TIMES SO THAT YOU UNDERSTAND IT. DO NOT PERFORM THE PROCEDURE OUT OF ORDER. THIS WILL RESULT IN DEATH OR SERIOUS INJURY.**
- Read our [Safety](#) page too.

TOOLS NEEDED:

1. 13mm Socket (3/8 or 1/2)
2. 1/2 drive break over bar
3. 3/8 or 1/2 drive ratchet
4. Various Extensions for ratchets
5. 1/4 inch nut driver or flat head screwdriver
6. Multiple shop towels (least 15)
7. lineman dikes or wire cutters
8. 2 wire coat hangers or Nylon cord
9. 1 roll masking tape

Procedure for Installation

1. Tie up all of the electric wiring and hoses to prevent damage before installing the



tank.


2. Install the fuel tank,



3. Install the four bolts that hold in fuel tank. Tighten all four bolts



4. Reconnect all hoses and vacuum lines from tank

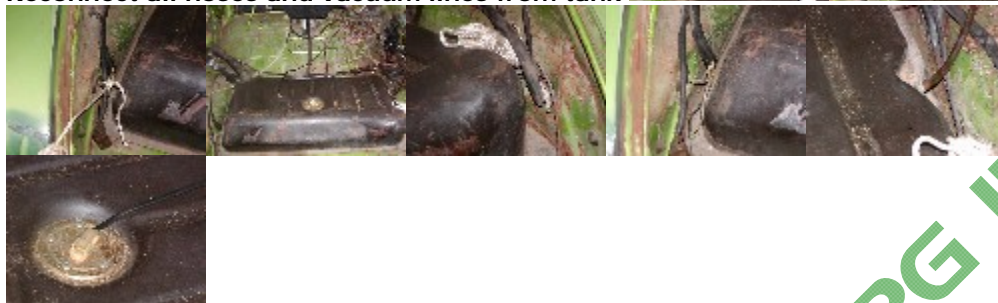

5. Reconnect the fuel line for the tank



Copyright 2005 WOLFSBURG II