

Lifting up Your VW: Both Front and Rear

[All Four tires in the air at once]




Changes to this page are IN PROGRESS

- **READ THE MANUAL FIRST!**
- *You MUST HAVE a FLAT surface to complete this repair for your safety.*
- **READ ALL OF THIS PROCEDURE SEVERAL TIMES SO THAT YOU UNDERSTAND IT. DO NOT PERFORM THE PROCEDURE OUT OF ORDER. THIS WILL RESULT IN DEATH OR SERIOUS INJURY.**
- Read our [Safety](#) page too. And see what happens when you do not follow [safety rules](#)!

We have available for download the complete procedure on our [DOWNLOADS](#) page

TOOLS NEEDED:

1. Floor Jack (4000 lbs. capacity)
2. [4 jack stands](#)
3. 2 Wheel Chocks
4. Tire iron or "Tire Star"

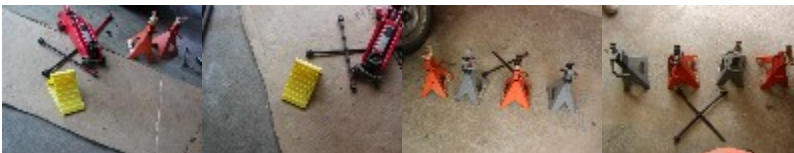

Procedure for Lifting



1. Chock rear tires.
2. Remove hub caps on all four wheel with a screwdriver or tire



iron



3. Break loose all lug bolts on all tires



4. Place floor jack in center of lower beam just behind the sway



bar on the front.

5. Jack up the vehicle to a height of a comfortable level for you to crawl underneath

6. **BEFORE GETTING UNDER THE VW:** Place jack stands just to



the outside of the zerk fittings on the front.



7. Place floor jack in center of the beam when lifting the rear of



the VW.

8. Jack up the vehicle to a height of a comfortable level for you



to crawl underneath



9. **BEFORE GETTING UNDER THE VW:** On the rear place the



Jack stands under the jack hole on **BOTH** sides



10. Remove all lug bolts and place them in the hub cap.



11. Remove the tires from the Brake Drums.



